

FEATURES

- Push button with up to 4 push areas depending on the used covers (not included)
- Supports KNX Data Secure
- Available colours, please refer to: <https://www.zennio.com/finishes>
- Input for temperature probe
- Thermostat
- Built-in temperature sensor
- Total data saving on KNX bus failure
- Integrated KNX BCU (TP1-256)
- Dimensions 70 x 70 x 28.8 mm (it protrudes 9.5 mm from the wall)
- Flush mount on back box
- Conformity with the CE, RCM directives (marks on the back side)

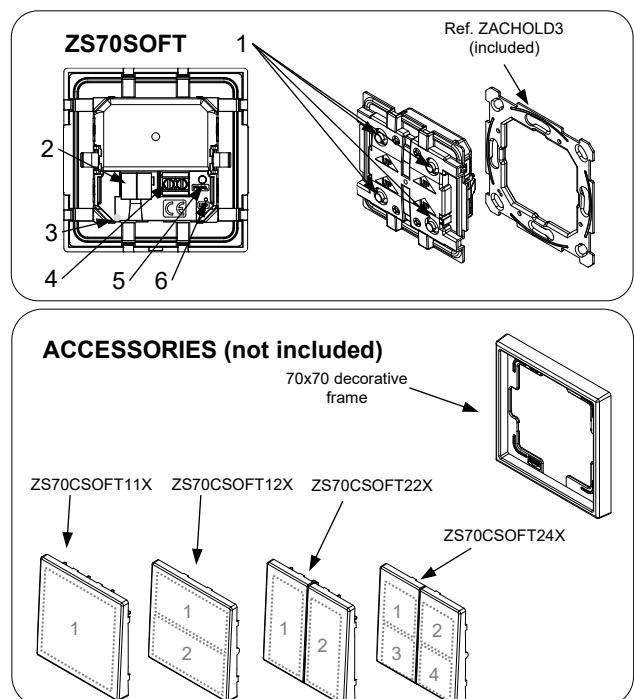


Figure 1: Soft Push button 70x70

1. Push area	2. KNX connector	3. Internal temperature probe
4. Temperature probe connector	5. Programming button	6. Programming LED

Programming button: short press to set programming mode. If this button is held while plugging the device into the KNX bus, it enters the safe mode. In order to perform a KNX Secure factory reset, while the device is in safe mode, press the button for 10 seconds until the programming LED changes its state.

Programming LED: programming mode indicator (red). When the device enters the safe mode, it blinks (red) every half second. During the start-up (reset or after KNX bus failure) and if the device is not in safe mode, it emits a red flash.

GENERAL SPECIFICATIONS

CONCEPT	DESCRIPTION				
Type of device	Electric operation control device				
KNX supply	Voltage (typical)	29 VDC SELV			
	Voltage range	21-31 VDC			
	Maximum consumption	mA	mW		
	29 VDC (typical)	3.9	113.1		
	24 VDC ¹	10	240		
Connection type		Typical TP1 bus connector for 0.8 mm Ø rigid cable			
External power supply	Not required				
Operation temperature	0 .. +55 °C				
Storage temperature	-20 .. +55 °C				
Operation humidity	5 .. 95%				
Storage humidity	5 .. 95%				
Complementary characteristics	Class B				
Protection class	III				
Operation type	Continuous operation				
Device action type	Type 1				
Electrical stress period	Long				
Degree of protection	IP20, clean environment				
Installation	Flush mount on back box				
Minimum clearances	Not required				
Response on KNX bus failure	Data saving according to parameterization				
Response on KNX bus restart	Data recovery according to parameterization				
Operation indicator	The programming LED indicates programming mode (red).				
Weight	66 g				
Housing material	PC+ABS FR V0 halogen free				

¹ Maximum consumption in the worst-case scenario (KNX Fan-In model).

TEMPERATURE PROBE INPUT SPECIFICATIONS AND CONNECTIONS

CONCEPT	DESCRIPTION
Number of inputs	1
Inputs per common	1
Operation voltage	3.3 VDC in the common
Operation current	1 mA @ 3.3 VDC (per input)
Switching type	Dry voltage contacts between input and common
Connection method	Screw terminal block (0.4 Nm max.)
Cable cross-section	0.5-2.5 mm ² (IEC) / 26-12 AWG (UL)
Maximum cable length	30 m
NTC accuracy (@ 25 °C) ²	±0.5 °C
Temperature resolution	0.1 °C
Maximum response time	10 ms


² For Zennio temperature probes.

INTERNAL TEMPERATURE SENSOR SPECIFICATIONS

CONCEPT	DESCRIPTION
Measuring range	-30 .. +90 °C
Temperature resolution	0.1 °C
NTC accuracy (@ 25 °C)	±0.5 °C

INPUTS CONNECTION

Temperature Probe*

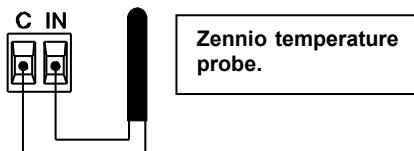


⚠ Commons of different devices must not be connected together.


* Zennio temperature probe or any NTC with known resistance values at three points in the range [-55, 150 °C].

INSTALLATION INSTRUCTIONS

1. Fix the metal plate into a square or round back box by using the screws from the box, checking that it is levelled.
2. Fix the cover or covers into the device depending on the desired functionality. Pay attention to the orientation of the button using the indications on the product itself.
3. Get the cables through the frame and connect the KNX bus and the inputs terminal to the back of the device.
4. Fit the device into its final position and check that the strength of the clips is enough to fix the device.

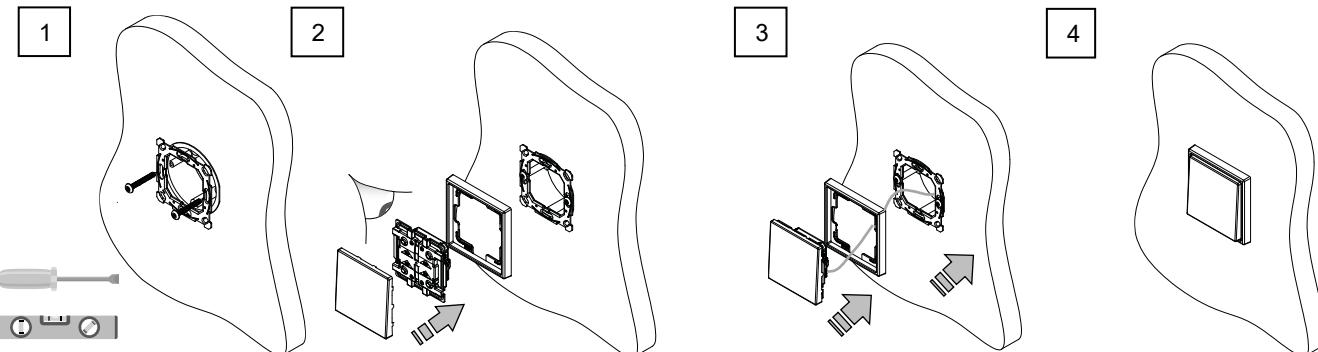

DIMENSIONS (mm)

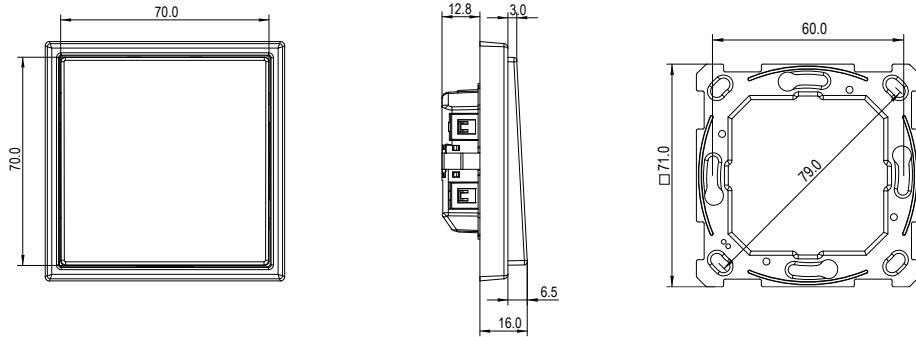

SAFETY INSTRUCTIONS AND ADDITIONAL NOTES

- Installation should only be performed by qualified professionals according to the laws and regulations applicable in each country.
- Do not connect the mains voltage nor any other external voltage to any point of the KNX bus; it would represent a risk for the entire KNX system. The facility must have enough insulation between the mains (or auxiliary) voltage and the KNX bus or the wires of other accessories, in case of being installed.
- Keep the device away from water (condensation over the device included) and do not cover it with clothes, paper or any other material while in use.
- The WEEE logo means that this device contains electronic parts and it must be properly disposed of by following the instructions at <https://www.zennio.com/en/legal/weee-regulation>.
- This device contains software subject to specific licences. For details, please refer to <https://zennio.com/licenses>.