


Conventional DND/MUR Panel



Product Code	ITR630-0002
Power Supply	12-36 V DC Power Supply
Power Consumption	12 - 36 V DC : 0.5 W
LED Indicators	1 x DND, 1 x MUR, 1 x Occupied (optional)
Push Buttons	1 x Bell Button
Inputs	Dry Contact Inputs
Contact Rating (Current)	1 A
Switching Voltage	125 V AC, 60 V DC - Max
Maximum Air Humidity	< 90 RH
Type of Protection	IP 20
Temperature Range	Operation (-5°C...55°C) Storage (-10°C...70°C)
Dimensions	103 x 179 x 33 mm (W x H x D)

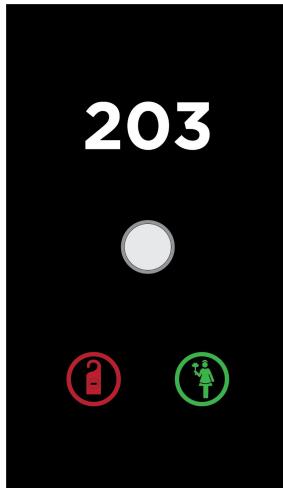


DESCRIPTION

The ITR630-0002 Conventional DND/MUR panel is a simple way for guests to communicate with staff from their room. If the customer does not want to be disturbed, need the room to be cleaned or is available for room service, it is as simple as touching related buttons. The product includes a doorbell button to announce visitors in a kindly way. Besides, optionally, the doorbell can be disabled whether the "Do Not Disturb" is active.

The Conventional DND/MUR Module needs a 12-36 V DC power supply for operating. Via input pins, communication can be made according to the desired state of the room.

Moreover, the Conventional DND/MUR module can be customized with the room number, icons (Do Not Disturb / Make Up Room / Occupied (optionally)), logo. Also, the logo of the hotel can be made on the doorbell button. So, hotels can simply integrate our technology into their design.

DIMENSIONS

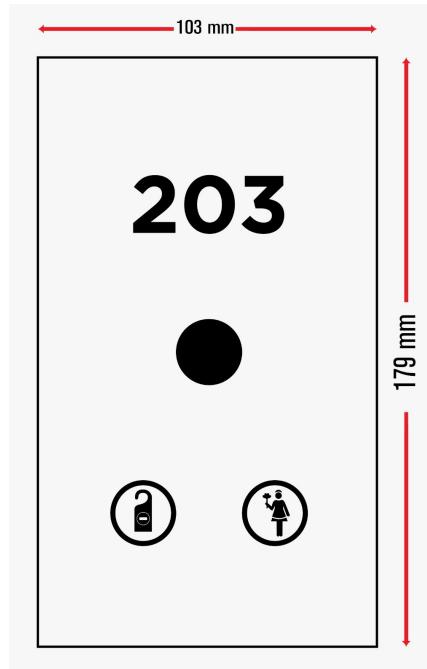

SAFETY INSTRUCTIONS

- Special Installation- This device is designed for a professional home automation solution. The installation should be made by high qualified electricians
- Cable Connections - Do not get the wrong connection for DC supply to be aware of the positive and negative pole connections. Also, for LEDs phase
- Voltage - DC power supply must be 12-36 V DC.
- Mounting Location - A suitable surface outside the respective hotel room.
- Screw down torque is less than 0.8 Nm.
- Avoid contact with liquids and corrosive gases.

CONNECTION DIAGRAM

